

### FEATURES

- Measuring of resistance of RTD sensors (Pt100, Pt1000, Ni100, ...)
- Programmable input and output
- Low power consumption
- Universal AC/DC or AC Auxiliary power supply
- Accuracy class: 0.5
- Serial communication RS232 or RS485 (very high speed data rate: up to 115,200 bit/s, MODBUS protocol)
- Housing for DIN rail mounting
- Correspond to EN 60770-1: 1999

### APPLICATION

Measuring transducer MI450 is designed for use in industrial process for conversion of nonlinear resistance sensors (RTD – sensors) in to appropriate DC current or DC voltage signal. The analogue output signal is proportional to the measured value and it is appropriate for regulation of analogue and digital devices with reasonable dependence on environmental conditions, where they are planned to be used.

### LAYOUT AND MODE OF OPERATION

Resistance on the input terminals can be measured with three methods, two, three or four wire connection. In all cases U-I method is used for measuring. Enforced current causes a voltage drop (A - Picture 2) on measured RTD sensor which is supplied to the programmable amplifier B. After A/D conversion the signal is computed in microprocessor C. The measured value determined by the microprocessor is assigned to the programmable analogue output E. Communication D enables programming of the measuring transducer and monitoring of the measuring resistance on the input terminal. Communication, analogue output and auxiliary power supply are electrically insulated from other system by means of separation transformer.

### VERSIONS

The following transducer versions are available (Table 1).

	Input	Type of RTD	Measuring voltage	Output	Supply	Communication	Bent characteristic of analogue output
Programmable	-200° to 850°C for Pt..., -60° to 250°C for Ni..., 20Ω to 10kΩ for polinom <sup>3)</sup>	Pt100 Pt1000 Ni100	< 2,2 V	5 mA 20 mA 10 V	Universal or AC: 57 V 100 V 230 V 400 V 500 V	RS232 or RS485	Programmable via communication
Fixed configuration	0 to 100 0 to 250 -100 to 800 <sup>4)</sup>	Pt100 Pt1000	< 2,2 V	1 mA 5 mA 10 mA 20 mA 4...20 mA	Universal or AC: 57 V 100 V 230 V 400 V 500 V	RS232, RS485 or without communication	To be specified at the placing order
	0 to 100 0 to 180 -50 to 150 <sup>4)</sup>	Ni100	< 2,2 V	1 V 10 V other on request			

Table 1: Versions of MI450


<sup>3)</sup> – With program package MiQen it is possible to set 6<sup>th</sup> grade polynomial function

<sup>4)</sup> – Other versions on request, measuring voltage in compliance with range

Transducers are mounted on standard rail 35 x 15 mm (according to DIN EN 50022).



Picture 1: Programmable transducer for RTD sensors MI450

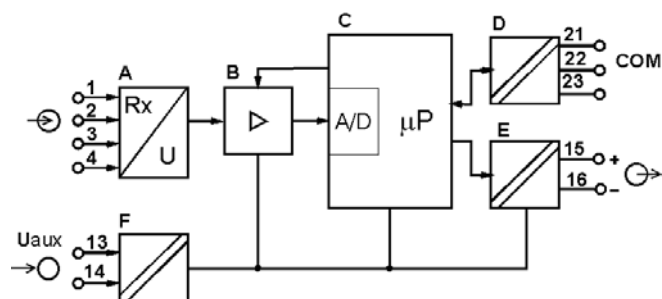

Picture 2: Block diagram

### PROGRAMMING

Input and output values are programmed<sup>1)</sup> with MiQen setting software via RS232 or RS485 communication. Before setting the transducer, output value must be selected by the jumpers on the output module<sup>2)</sup>. It is possible to choose between three ranges 0...±10 V, 0...±5 mA and 0...±20 mA. Within this three ranges it is possible to set any linear or bent (with maximum 5 break points) output characteristic.

<sup>1)</sup> – Programming is not possible in versions without communication

<sup>2)</sup> – Qualified person only

## TECHNICAL DATA

### GENERAL:

- Measured quantity: temperature from RTD sensor
- Measured principle: microprocessor sampling

### INPUT:

- Measuring method: two wire connection  
three wire connection  
four wire connection
- Input range with programmable ratings:  
RTD sensors limit values: Measuring voltage: < 2,2 V  
20 Ω to 10 kΩ
- Minimum temperature range: 100° K or 40 Ω
- Lead resistance: < 10 Ω per lead
- Consumption: < 0.5 VA

### ANALOGUE OUTPUT:

#### Programmable DC current output:

- Output  $I_{OutN}$  (output range end value):
- Output range values <sup>5)</sup>: 0...±1 mA to 0...±5 mA or, 0...±5 mA to 0...±20 mA
- Burden voltage: 15 V
- External resistance:  $R_{Bmax} \cdot [k\Omega] = \frac{15V}{I_{OutN} [mA]}$


<sup>5)</sup> - Depends of set jumpers on output module

#### Programmable DC voltage output:

- Output  $U_{OutN}$  (output range end value):
- Output range values 0...±1 V to 0...±10 V
- Burden current: 20 mA
- External resistance:  $R_{Bmin} \cdot [k\Omega] = \frac{U_{OutN} [V]}{20mA}$

### General:

- Response time: programmable from 0.5 s to 60 s
- Residual ripple: < 1 % p.p.
- Maximum output value: limited at 125 %

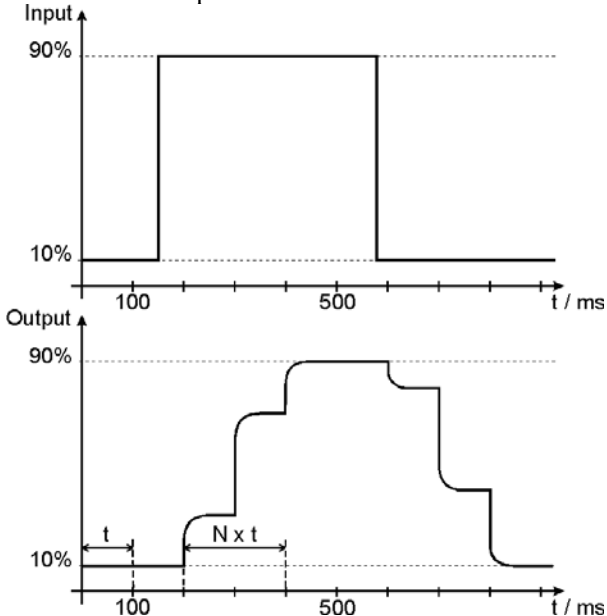

Picture 3: Output transfer characteristic

N – Number of sliding windows

t – Sampling time

The output may be either short or open-circuited and it is electrically insulated from all other circuits (floating).

All the output range end values can be reduced subsequently using the programming software, but a supplementary error results.

### ACCURACY:

- Reference value: Input range end value
- Accuracy class: Analogue output <sup>6)</sup>: Temperature 0.5 c  
Communication: Temperature 0.5

<sup>6)</sup> – To calculate intrinsic error, see chapter intrinsic-error (for analogue outputs) on this page.

### Reference conditions:

- Ambient temperature: 15...30 °C
- Input: 0...100 %  $R_N$

### Intrinsic-error (for analogue outputs):

For intrinsic-error for analogue outputs with bent or linear-zoom characteristic multiply accuracy class with correction factor (c).

Correction factor c (the highest value applies):


Linear characteristic

$$c = \frac{1 - \frac{y_0}{y_e}}{1 - \frac{x_0}{x_e}} \quad \text{or} \quad c = 1$$

Bent characteristic

$$x_{b-1} \leq x \leq x_b \quad b - \text{number of break points (1 to 5)}$$

$$c = \frac{y_b - y_{b-1}}{x_b - x_{b-1}} \cdot \frac{x_e}{y_e} \quad \text{or} \quad c = 1$$

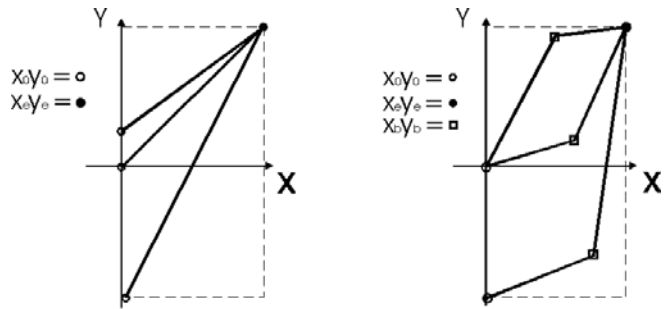

-- Limit of the output range

Picture 3: Examples of settings with linear and bent characteristic

### POWER SUPPLY:

#### Auxiliary AC/DC voltage (universal):

- Rated voltage ( $U_r$ ): 24...300 V DC  
40...276 V AC
- Frequency range: 40...70 Hz
- Power consumption: < 3 VA

#### Auxiliary AC voltage:

Rated voltage ( $U_r$ )	Rated operating range
57.74 V	80...120 % $U_r$
100 V	
230 V	
400 V <sup>7)</sup>	
500 V <sup>7)</sup>	

<sup>7)</sup> – to 300 V installation category III, from 300 to 500 V installation category II – see chapter Regulations.

Table 3: Rated AC voltage for Auxiliary power supply

- Frequency range: 45...65 Hz
- Power consumption: < 3 VA


## COMMUNICATION (OPTIONAL):

### RS232

- Connection type: Point to point
- Signal levels: RS232
- Maximum cable length: 15 m
- Connector: Screw terminals
- Isolation: 3.7 kV rms for 1 minute between all terminals and all other circuits, except between communication terminals and output terminals, 2 kV rms for 1 minute
- Transmission mode: Asynchronous
- Message format: MODBUS RTU
- Data rate (very high speed): 1,200 to 115,200 bits/s
- RS232 connections

MI450	9 pin D connector (PC)	25 pin D connector (PC)
Rx (21)	Tx (3)	Tx (2)
⏏ (22)	GND (5)	GND (7)
Tx (23)	Rx (2)	Rx (3)

Table 4: RS232 connections

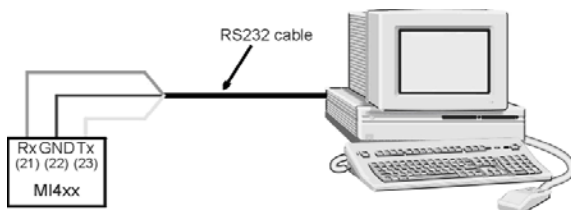

Picture 5: Connection of MI450 on PC via RS232 communication


### RS485

- Connection type: Multi-drop (32 connections per link)
- Signal levels: RS485
- Cable type: Screened twisted pair
- Maximum cable length: 1000 m
- Connector: Screw terminals
- Isolation: 3.7 kV rms for 1 minute between all terminals and all other circuits, except between communication terminals and output terminals, 2 kV rms for 1 minute
- Transmission mode: Asynchronous
- Message format: MODBUS RTU
- Data rate (very high speed): 1,200 to 115,200 bits/s
- RS485 connections

MI450	RS485
A (21)	DATA +
C (22)	NC <sup>8)</sup>
B (23)	DATA -

Table 5: RS485 connections

<sup>8)</sup> – NC – do not connect

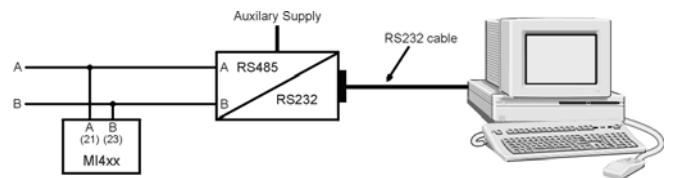

Picture 6: Connection of MI450 on RS485 communication line

### HOUSING:

- Material of housing: PC/ABS unflammmable, according to **UL 94 V-0**
- Mounting: For rail mounting, 35 x 15 mm according to **DIN EN 50022: 1978**
- Enclosure protection: IP 50 (IP 20 for connection terminals) according to **EN 60529: 1989**
- Weight: Approx. 300 g

### CONNECTION TERMINALS:

- Permissible cross section of the connection leads:
  - ≤ 4.0 mm<sup>2</sup> single wire
  - 2 x 2.5 mm<sup>2</sup> fine wire

### REGULATIONS:

- Protection: Protection class **II**  
**300 V rms**, installation category **III**  
**500 V rms**, installation category **II**  
Pollution degree 2
- Test voltage: 3.7 kV rms according to **EN 61010-1: 1990**

### ENVIRONMENTAL CONDITIONS:

- Climatic rating: Climate class 2 acc. to **EN 60688: 1992**
- Operating temperature: -10 to +55 °C
- Storage temperature: -40 to +70 °C
- Annual mean relative humidity: ≤ 75% r.h.

### EU DIRECTIVES CORRESPONDING FOR CE MARKING

Low voltage directive **73/23/EEC:**

**EN 61010-1: 1993** and **EN 61010-A3: 1995**

Safety requirements for electrical equipment for measurement, control, and laboratory use, Part 1: General requirements

EMC directive **89/336/EEC:**

**EN 61326-1: 1997**


Electrical equipment for measurement, control, and laboratory use

EMC requirements, Part 1: General requirements.

Commentary: If strong HF electromagnetic fields are expected in the place where transducer will be used, usage of 5mA analogue output is recommended, because in that case field influence on the transducer is the lowest.

## Marking


Measuring transducers with linear characteristic:  
One label at the front of housing (Picture 7a):



Picture 7a: Example of label for transducer with linear characteristic

Measuring transducers with bent characteristic:


One label at the front of the housing and additional label at the top of the housing (Picture 7b):

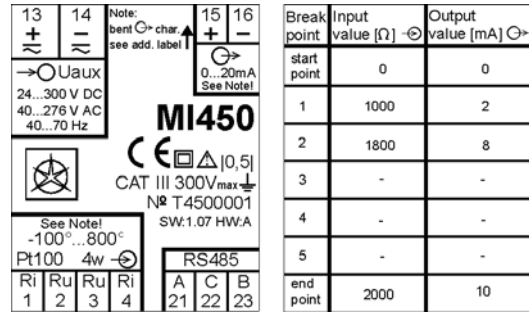


Picture 7b: Example of label for transducer with bent characteristic

## CONNECTION


Type of connection can be specified with the order or changed via communication with MiQen software. The connection terminals marking can be found on the front plate.

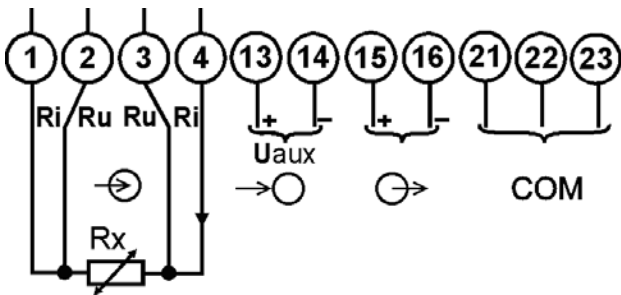

Picture 8a: Connection diagram 4-wire

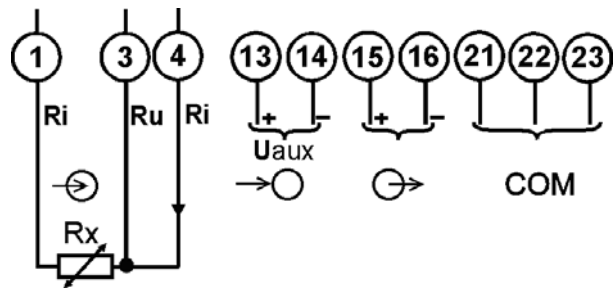


Picture 8b: Connection diagram 3-wire

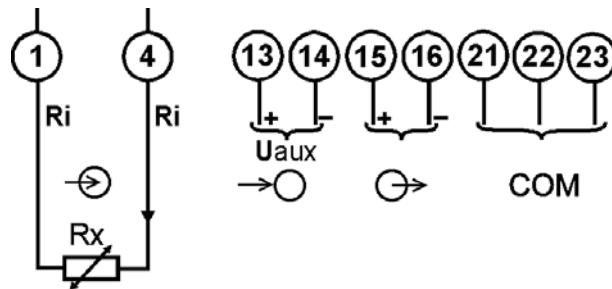

Picture 8c: Connection diagram 2-wire

## DIMENSIONAL DRAWING

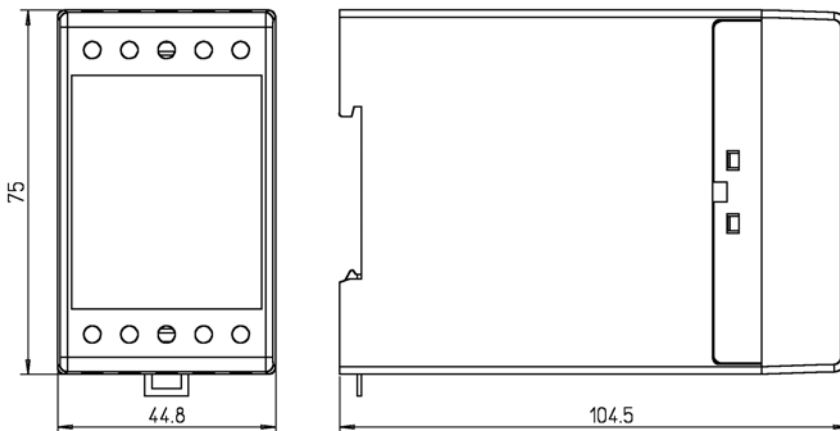

Picture 9: Dimensional drawing (all dimensions are in mm)

## SPECIFICATION AND ORDERING INFORMATION

For ordering it is necessary to declare type of the transducer (MI450), type of RTD sensor or polynomial function, measuring range, output quantity and range, type of power supply, type of communication and shape of output characteristic.

ORDERING CODE:

MI450 *b; c; d...e F; G; H(i V); J; K*

MI450		Value	Code
<i>b</i>	Type of sensor or input polynomial function of X <sup>6</sup> order	Pt100; Pt1000; Ni100 ...	b
<i>c</i>	Measuring range:	-200° to 850° C (depends of sensor type)	-200° ≤ c ≤ 850°
		20 Ω to 10 kΩ (for polynomial function)	20 Ω ≤ c ≤ 10 kΩ
<i>d</i>	Start value of output signal	-20...20 - current output -10...10 - voltage output	-20 ≤ c ≤ 20
<i>e</i>	End value of output signal	0...20 - current output 0...10 - voltage output	1 ≤ d ≤ 20
<i>F</i>	Type of output signal	current - mA	mA
		voltage - V	V
<i>G</i>	Type of connection	2 - vire	2
		3 - vire	3
		4 - vire	4
<i>H</i>	Type of power supply	universal power supply	U
		AC power supply	A
<i>i</i>	Value of power supply voltage (only for AC power supply)	57 V	57
		100 V	100
		110 V	110
		230 V	230
		300 V	300
<i>J</i>	Type of communication	RS 232	2
		RS 485	4
		no communication	0
<i>K</i>	Type of output characteristic	linear	L
		<sup>9)</sup> bent 1...5 (number of break points)	1 ≤ I ≤ 5
		Napetost - V	V


Table 6: Ordering information

<sup>9)</sup> - For ordering code for bent characteristic see additional ordering information Table 7.

### ORDERING EXAMPLE FOR TRANSDUCER WITH LINEAR OUTPUT CHARACTERISTIC

Measuring transducer MI450, for Pt100 RTD sensor with temperature range 0...100 C, output range 4...20 mA, 4-vire connection, 110 V AC power supply, communication RS232 and linear output characteristic (Graph 1).

MI450 Pt100; 0...100°; 4...20 mA; 4; A 110 V; 2; L

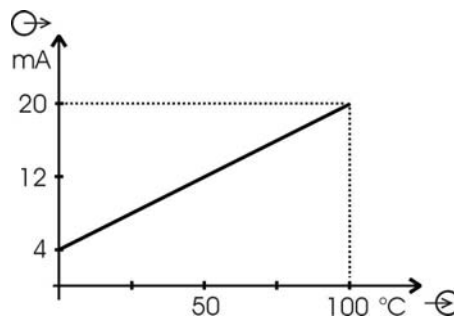

Graph 1: Example of linear output characteristic

### Additional ordering information

For ordering transducer with bent characteristic it is necessary to declare breaking points in output characteristic (maximum 5 breaking points).

Ordering code for transducers with bent output characteristic:

MI450 *b; c; d...e F; G; H(i V); J; K(l<sub>1</sub>/m<sub>1</sub>; l<sub>2</sub>/m<sub>2</sub>; ...)*

MI450		Value	Code
<i>l</i>	value of input quantity	depends of measuring range	-200° ≤ l ≤ 850° or 20 Ω ≤ l ≤ 10 kΩ (depends of measuring range and type of RTD sensor)
<i>m</i>	value of output quantity when input value is k	-20...20 (depends of output range)	-20 ≤ m ≤ 20


Table 7: Ordering information for bent characteristic

The sequence of breaking points must rise with measured quantity.

### ORDERING EXAMPLE FOR TRANSDUCERS WITH BENT OUTPUT CHARACTERISTIC

Measuring transducer MI450 for Pt100 RTD sensor with temperature range 0...500 kΩ, output range 0...10 mA, 4-vire connection, universal power supply, communication RS485 and bent output characteristic. The transducer is zooming the range from 150°C to 250°C (Graph 2)

MI450 Pt100; 0...500°; 0...10 mA; 4; U; 4; 2(150/2; 250/8)

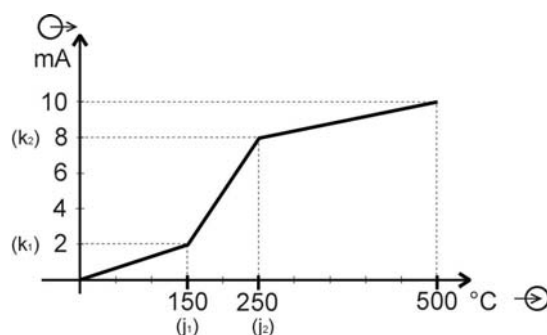

Graph 2: Example of bent output characteristic with two breaking points.



Ljubljanska c. 24a  
SI-4000 Kranj  
Slovenia  
tel.: +386 4 237 21 12  
fax: +386 4 237 21 29  
e-mail: info@iskra-mis.si  
www.iskra-mis.si

