

Multi Transducer & Analyser

UMT560 / MT560

Multi Transducer & Recorder

UMT550 / MT550



Iskra MIS



**CLASS
0.1**

RS²³²₄₈₅


USB 2.0


ETHERNET

**FLASH
8 MB**

- ***Evaluation of the electricity supply quality in compliance with EN 50160***
- ***Voltage and current auto range measurements up to 600V_#, 12.5A***
- ***Wide measurement frequency range 16 – 400 Hz***
- ***Power accuracy class 0.2 (IEC-688), 0.1 on communication***
- ***Up to three independent communication ports (Serial, Ethernet and USB communication)***
- ***Remote display***
- ***Up to four I/O modules (analogue in/out, pulse in/out, digital in/out, alarm out, tariff in)***
- ***Powerful analogue out; 6 voltage and current ranges, non-linear characteristics...***

PROPERTIES

- Evaluation of the electricity supply quality in compliance with EN 50160 (UMT/MT560 only)
- Measurements of instantaneous values of more than 140 quantities (U, I, P, Q, S, PF, PA, f, φ, THD, MD, energy, energy cost by tariffs, etc.)
- Power accuracy class 0.2
- Harmonic analysis of phase, phase-to-phase voltages and currents up to the 63rd harmonic (UMT/MT550 up to 31st harmonic)
- Recording up to 32 measurands and 32 alarms in the internal memory (8 MB flash)
- Measurements of 40 minimal and maximal values in different time periods
- 32 adjustable alarms
- Frequency range from 16 Hz to 400 Hz
- Up to three independent communication ports (RS 232/485 up to 115,200 bit/s, Ethernet and USB communication possible)
- MODBUS and DNP3 communication protocols
- Remote display connection
- Up to 4 inputs or outputs (analogue inputs/outputs, digital inputs/outputs, alarm outputs, pulse input/outputs, tariff inputs)
- Universal power supply (two voltage ranges)
- Automatic range of nominal current and voltage (max. 12.5 A and 600 V_{L-N})
- Adjustable tariff clock, display of electric energy consumption in selected currency
- Housing for DIN rail mounting
- User-friendly setting software, MiQen

DESCRIPTION

UMT550/560 are intended for measuring, analysing and monitoring single-phase or three-phase electrical power network. They measure RMS value by means of fast sampling of voltage and current signals, which makes instruments suitable for acquisition of transient events. A built-in microcontroller calculates measurands (voltage, current, frequency, energy, power, power factor, THD phase angles, etc.) from the measured signals.

COMPLIANCE WITH STANDARDS:

Standard EN	Description
61 010-1	Safety requirements for electrical equipment for measurement, control and laboratory use
60 688	Electrical measuring transducers for converting AC electrical variables into analogue and digital signals
50 160	Voltage characteristics of electricity supplied by public distribution networks
62 052-11	Electricity metering equipment – General requirements, tests and test conditions
62 053-22	Electricity metering equipment – Particular requirements
61000-6-2	Electromagnetic compatibility (EMC) –Immunity for industrial environments
61000-6-4	Electromagnetic compatibility (EMC) –Emission standard for industrial environments
60 529	Degrees of protection provided by enclosures (IP code)
60 068-2-1/ -2/ -6/ -27/-30	Environmental testing (-1 Cold, -2 Dry heat, -30 Damp heat, -6 Vibration, -27 Shock)
UL 94	Tests for flammability of plastic materials for parts in devices and appliances

Table 1: List of applicable standards

APPLICATION

The (U)MT560 multi transducer and analyser is used for a permanent analysis of electricity supply quality in compliance with the EN 50160 standard. Records are stored in the internal memory for the period of the last three years. Moreover, more than 100,000 deviations of the measurands from the standard values are stored, which enables finding eventual reasons for the problems in network. Wide range of various I/O modules makes (U)MT560 a perfect choice for numerous applications. (U)MT560 can be delivered pre-configured to the required measuring set-up and output characteristic or it can be delivered un-configured for customer configuration with user friendly setting software MiQen. (U)MT560 supports a wide range of communication interfaces. Standard serial RS232/485 with speed up to 115200 baud is perfect for simple applications and serial bus interfacing. Ethernet 10/100 is ideal for a long distance monitoring and configuration of numerous transducers. USB 2.0 can be used for a fast set-up or memory acquisition.

8Mb internal flash memory can store records of harmonics (up to 63rd for (U)MT560) and other events, important for **electrical network analysis** (periodical or permanent)

Pulse inputs are suitable for **reading consumption counters** (water, gas, heat, compressed air...) and displaying that consumption in primary values.

In combination with analogue extender **EX104** it is possible to support up to 7 analogue outputs.

In combination with remote display **RD500** it is possible to remotely monitor readings and make settings of up to 32 in a network connected transducers.

TECHNICAL DATA

MEASUREMENT INPUT ^①

Nominal frequency range	50, 60 Hz
Measuring frequency range	16–400 Hz (max. 1000 Hz)

Current measurements:

Nominal value (I_N)	0.31...5 A
Max. measured value	12.5 A sinusoidal
Max. allowed value (thermal) (acc. to IEC/EN 60 688)	15 A cont. 20 × I_N ; 5 × 1 s
Consumption	< $I^2 \times 0.01\Omega$ per phase

Voltage measurements:

Nominal value (U_N)	57.7...500 V_{LN}
Max. measured value (cont.)	600 V_{LN} ; 1000 V_{LL}
Max. allowed value (acc. to IEC/EN 60 688)	2 × U_N ; 10 s
Consumption	< $U^2 / 4.2M\Omega$ per phase
Input impedance	4.2M Ω per phase

System:

Voltage inputs can be connected either directly to low-voltage network or via a high-voltage transformer to high-voltage network.

Current inputs can be connected either directly to low-voltage network or shall be connected to network via a corresponding current transformer (with standard 1 A or 5 A outputs).

For more information about different system connections see CONNECTION on page 5.

BASIC ACCURACY UNDER REFERENCE CONDITIONS

Total accuracy (measurements and analogue output) according to IEC/EN 60 688

Accuracy is presented as percentage of reading of the measurand except when it is stated as an absolute value.

Measurand	Accuracy (± % of reading)	
Current Rms	0.2	0.05 ⁽¹⁾
Voltage Rms P-N and P-P	0.2	0.05 ⁽¹⁾
Power (P, Q, S)	0.2	0.1 ⁽¹⁾
Power factor (PF)	0.1°	
Frequency (f)	10 mHz	
P-N and P-P angle	0.1	
THD (U), THD (I) (0...400 %)	0.5	
Active energy	Class 1	0.5S ⁽²⁾
Reactive energy	Class 2	0.5 ⁽²⁾
Real time clock (RTC)	1 min/month	

⁽¹⁾ On communication

⁽²⁾ Optional

COMMUNICATION

(U)MT560/550 has a wide variety of communication possibilities to suit specific demands. It is equipped with two standard communication ports (COM1A, COM1B) and one optional (COM2). This allows UP TO THREE different users to access data from a device simultaneously and by using ethernet communication, data can be accessed worldwide.

Different configurations are possible (to be specified with an order).

Configuration	COM1A	COM1B	COM2 ⁽²⁾
1	RS232/485 ⁽³⁾	/	/
2	RS232/485 ⁽³⁾	/	RS485
3	USB	/	/
4	USB	/	RS485
5 ⁽¹⁾	Ethernet	USB	/
6 ⁽¹⁾	Ethernet	USB	RS485

⁽¹⁾ Galvanic separation between COM1A and COM1B is 1 kV_{ACRMS}

⁽²⁾ COM2 (RS485 only) uses connection terminals of I/O4 module in case of secondary communication or RJ11 connector in case of remote display communication

⁽³⁾ RS485 communication is available through DB9 or screw-in terminals, while RS232 is available only through DB9

Table 2: List of communication configurations

Serial communication:	RS232 ⁽¹⁾	RS485 ⁽¹⁾⁽²⁾
Connection type	Direct	Network
Connection terminals	DB9 ⁽¹⁾	screw terminals ⁽¹⁾
Function	Settings, measurements and records acquisition, firmware upgrade	
Insulation	Protection class I, 3.3 kV _{ACRMS} 1 min	
Max. connection length	3 m	1000 m
Transfer mode	Asynchronous	
Protocol	MODBUS RTU, DNP3 (autodetect)	
Transfer rate	2.4 kBaud to 115.2 kBaud	
Number of bus stations	/	≤ 32

⁽¹⁾ Both types of comm. are available but only one at a time


⁽²⁾ Specifications are identical for COM2

Ethernet:	
Connection type	Network
Connection terminals	RJ-45
Function	Settings, measurements and records acquisition, firmware upgrade
Insulation	Protection class I, 3.3 kV _{ACRMS} 1 min
Transfer mode	Asynchronous
Protocol	MODBUS TCP, DNP3 (autodetect)
Transfer rate	10/100Mb/s autodetect

USB:	
Connection type	Direct
Connection terminals	USB-B
Function	Settings, measurements and records acquisition, firmware upgrade
Insulation	Protection class I, 3.3 kV _{ACRMS} 1 min
Transfer mode	Asynchronous
Protocol	MODBUS RTU, DNP3 (autodetect)
Transfer rate	USB 2.0

REMOTE DISPLAY

Remote display is very useful for a quick look-up to all measured parameters or to set up the (U)MT560/550 measuring transducers without the PC. Navigation keys and graphical LCD display enable remote application and remote display settings. By choosing different RD500 target communication addresses it is possible to track measurements and change settings for up to 32 (U)MT560/550 measuring transducers.

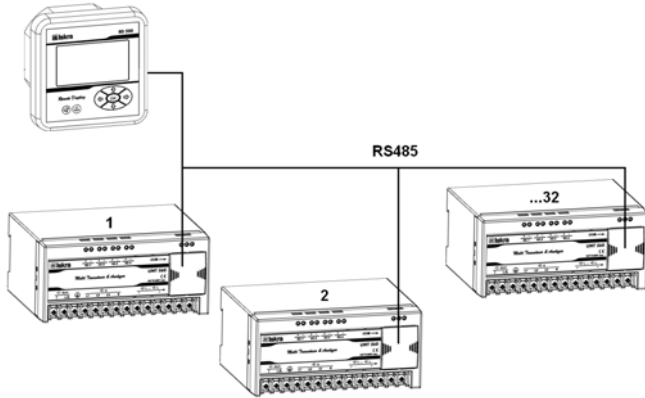

Connection of remote display RD500 depends on application:

- **DIRECT CONNECTION TO A SINGLE (U)MT560/550**

This type of connection is useful for instant measurement and waveform acquisition as well as adjusting settings of a single (U)MT560/550 by using a quick access RJ11 jack (under the transparent cover).

- **BUS CONNECTION TO MULTIPLE (U)MT560/550**

This type of connection is useful for a remote monitoring and adjusting settings of multiple (up to 32) (U)MT560/550 attached to a RS485 bus through COM1 or COM2 (if available) communication port. To access each individual (U)MT560/550, the user should enter an address of required (U)MT560/550.

For more information about connection, and using of remote display see User's manual.

INPUT / OUTPUT MODULES

(U)MT560/550 is equipped with four multipurpose input/output slots. The following modules are available:

Analogue input	4 outputs	any I/O
Analogue output	4 outputs	any I/O
Digital input	4 inputs	any I/O
Digital output	4 outputs	any I/O
Pulse input	4 outputs	any I/O
Pulse output	4 outputs	any I/O
Alarm output	4 outputs	any I/O
Tariff input	2 inputs	I/O 1,2
Additional comm. port (COM2)*	1 I/O	I/O 4

*See page 3 (serial communication)

Analogue input:

Three types of analogue inputs are suitable for acquisition of low voltage DC signals from different sensors. According to application requirements it is possible to choose current, voltage or resistance (temperature) analogue input. They all use the same output terminals.

MiQen software allows setting an appropriate calculation factor, exponent and required unit for representation of primary measured value (temperature, pressure, flux...)

DC current input:

Nominal input range 1	-20...0...20 mA ($\pm 20\%$)
Nominal input range 2	-2...0...2 mA ($\pm 20\%$)
input resistance	20 Ω
accuracy	0.5 % of range
temperature drift	0.1% / °C (for range 2)
conversion resolution	16 bit (sigma-delta)
Analogue input mode	internally referenced Single-ended

DC voltage input:

Nominal input range 1	-10...0...10 V ($\pm 20\%$)
Nominal input range 2	-1...0...1 V ($\pm 20\%$)
input resistance	100 k Ω
accuracy	0.5 % of range
temperature drift	0.1% / °C (for range 2)
conversion resolution	16 bit (sigma-delta)
Analogue input mode	internally referenced Single-ended

Resistance (temperature) input:

Nominal input range (low)*	0 - 200 Ω (max. 400 Ω) PT100 (-200°C-850°C)
Nominal input range (high)*	0 - 2 k Ω (max. 4 k Ω) PT1000 (-200°C-850°C)
connection	2-wire
accuracy	0.5 % of range
conversion resolution	16 bit (sigma-delta)
Analogue input mode	internally referenced Single-ended

* Low or high input range and primary input value (resistance or temperature) are set by the MiQen setting software

Analogue output:

Each of up to four analogue outputs is fully programmable and can be set to any of 6 full-scale ranges, 4 current and 2 voltage, without opening an instrument. They all use the same output terminals. Analogue outputs can represent any of the measured values as well as analogue input quantity.

Programmable DC current output:

Output range values -100...0...100%

-1...0...1 mA	Range 1
-5...0...5 mA	Range 2
-10...0...10 mA	Range 3
-20...0...20 mA	Range 4
other ranges possible	Sub range

Burden voltage	10 V
External resistance	$R_{Bmax} = 10 V / I_{outN}$

Max. current	30 mA ($R_{ONmax} = 8\Omega$)
Pulse length	programmable 1...999 ms

Tariff input

Rated voltage	230 or 110 V _{AC} ± 20 %
Max. current	< 0.6 mA
Frequency range	45...65 Hz
SET voltage	40...120 % of rated voltage
RESET voltage	0...10 % of rated voltage

Programmable DC voltage output:

Output range values –100...0...100%	
-1...0...1 V	Range 5
-10...0...10 V	Range 6
other ranges possible	Sub range
Burden current	5 mA
External resistance	$R_{Bmin} = U_{outN} / 5 \text{ mA}$

General:

Linearization	Linear, Quadratic
No. of break points	5
Output value limits	± 120% of nominal output
Response time (measurement and analogue output)	< 100 ms
Residual ripple	< 0.5 % p.p.

The outputs 1 to 4 may be either short or open-circuited. They are electrically insulated from each other (500 VACrms) and from all other circuits (3320 VACrms). All output range values can be altered subsequently (zoom scale) using the setting software, but a supplementary error results (see INTRINSIC ERROR).

Digital input

Rated voltage	48 V AC/DC (+ 40% max)
Max. current	< 1.5 mA
Min. signal width	20 ms
Min. pause width	40 ms
SET voltage	40...120 % of rated voltage
RESET voltage	0...10 % of rated voltage

Alarm (digital) output:

Type	Relay switch
Rated voltage	48 V AC/DC (+40% max)
Max. switching current	200 mA
Contact resistance	≤ 100 mΩ (100 mA, 24V)
Impulse	Max. 4000 imp/hour Min. length 100 ms
Insulation voltage	
Between coil and contact	4000 VDC
Between contacts	1000 VDC

Pulse input

Rated voltage	5 - 48 V DC (± 20%)
Max. current	8 mA (at 48 VDC + 20%)
Min. pulse width	0.5 ms
Min. pulse periode	2 ms
SET voltage	40...120 % of rated voltage
RESET voltage	0...10 % of rated voltage

Pulse output

Type	Solid state
Max. voltage	40 V AC/DC

UNIVERSAL POWER SUPPLY


Standard (high):

Nominal voltage AC	80 ... 276 V
Nominal frequency	40 ... 65 Hz
Nominal voltage DC	70 ... 300 V
Consumption	< 8VA
Power-on transient current	< 20 A ; 1 ms

Optional (low):

Nominal voltage AC	48 ... 77 V
Nominal frequency	40 ... 65 Hz
Nominal voltage DC	19 ... 70 V
Consumption	< 8VA
Power-on transient current	< 20 A ; 1 ms

SAFETY:

Protection:	protection class I (protective earth terminal due to touchable metal parts (USB-B, RJ-45, DB9), current limiting fuse 1A on aux. supply Voltage inputs via high impedance Double insulation for I/O ports and COM1-2 ports
	
Pollution degree	2
Installation category	CAT III ; 600 V _# meas. inputs CAT III ; 300 V _# aux. supply Acc. to EN 61010-1
Test voltages	$U_{AUX} \leftrightarrow I/O$, COM1,2: 2210 VAC _{rms} $U_{AUX} \leftrightarrow U$, I inputs: 3320 VAC _{rms} U, I inputs \leftrightarrow I/O, COM1,2: 3320 VAC _{rms} HV Tariff input \leftrightarrow I/O, COM1,2: 2210 VAC _{rms} U inputs \leftrightarrow I inputs: 3320 VAC _{rms}
Enclosure material	PC/ABS Acc. to UL 94 V-0
Enclosure protection	IP 40 (IP 20 for terminals)

MECHANICAL

Dimensions	100 × 123 × 75 mm
Mounting	Rail mounting 35 × 15 mm acc. to DIN EN 50 022
Enclosure material	PC/ABS, PC (sliding cover)
Flammability	Acc. to UL 94 V-0
Weight	500 g

AMBIENT CONDITIONS:

Ambient temperature	usage group III -10...0...45...55 °C Acc. to IEC/EN 60 688
Operating temperature	-30 to +70 °C

Storage temperature -40 to +70 °C
 Average annual humidity ≤ 93% r.h.

AUXILIARY BATTERY

A built-in replaceable auxiliary battery enables the clock operation and recording the measurements in the memory with the time stamp. The battery shall be replaced by the authorised service.

Type CR2032 Li-battery
 Nominal voltage 3 V
 Life span approx. 6 years (typical at 23°C)

INTRINSIC-ERROR (FOR ANALOGUE OUTPUTS):

For intrinsic-error for analogue outputs with bent or linear-zoom characteristic multiply accuracy class with correction factor (c). Correction factor c (the highest value applies):

Linear characteristic


$$c = \frac{1 - \frac{y_0}{y_e}}{1 - \frac{x_0}{x_e}} \quad \text{or} \quad c = 1$$

Bent characteristic

$$x_{b-1} \leq x \leq x_b$$

b – number of break point (1 to 5)

$$c = \frac{y_b - y_{b-1}}{x_b - x_{b-1}} \cdot \frac{x_e}{y_e} \quad \text{or} \quad c = 1$$

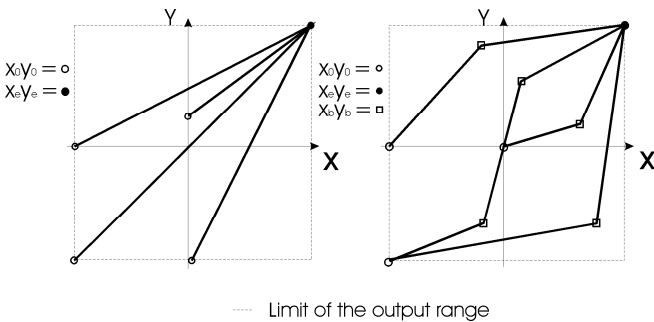

Examples of settings with linear and bent characteristic

RECORDER

A built-in recorder (8Mb) enables storing measurements and detected alarms. The recorder is additionally used for measurements related to the inspection of voltage quality.

ALARMS

(U)MT560/550 supports recording and storing of 32 alarms in four groups. A time constant of maximal values in a thermal

mode, a delay time and switch-off hysteresis are defined for each group of alarms.

MiQen - setting and acquisition Software

MiQen software is intended for supervision of (U)MT560/550 and many other instruments on a PC. Network and the transducer setting, display of measured and stored values and analysis of stored data in the transducer are possible via the serial, Ethernet or USB communication. The information and stored measurements can be exported in standard Windows formats. Multilingual software functions on Windows 98, 2000, NT, XP operating systems.

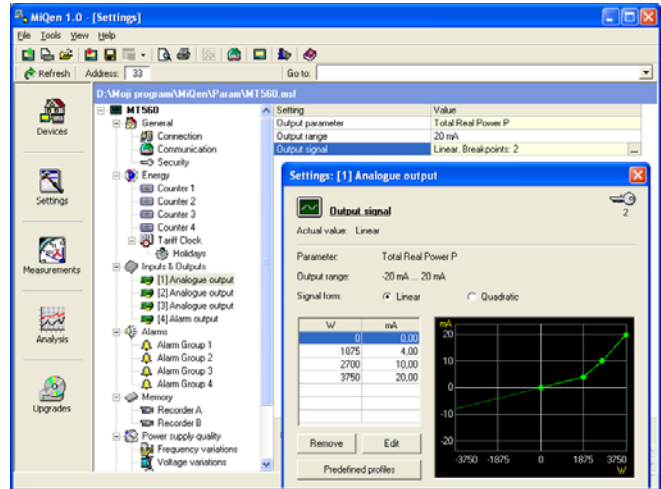


Fig 3: MiQen setting and acquisition software

MiQen software is intended for:

- Setting all of the instruments parameters (online and offline)
- Viewing current measured readings and stored data
- Setting and resetting energy counters
- Complete I/O modules configuration
- Evaluation of the electricity supply quality in compliance with SIST EN 50160, (U)MT560 only
- Upgrading instruments firmware
- Searching the net for devices
- Virtual interactive instrument
- Comprehensive help support

HANDLING THE COSTS


A special, (U)MT560 only, function is cost evaluation of energy (active, reactive and total) per tariffs. The transducer itself enables tracing the costs in optional currency and calculates consumption by means of the adjustable tariff clock and electric energy price.

CONNECTION

System/ connection	Terminal assignment
Single-phase connection 1b (1W)	
Three-phase three-wire connection with balanced load 3b (1W3)	
Three-phase three-wire connection with unbalanced load 3u (2W3)	

System/ connection	Terminal assignment
Three-phase four wire connection with balanced load 4b (1W4)	
Three-phase four wire connection with unbalanced load 4u (3W4)	

DIMENSIONAL DRAWING

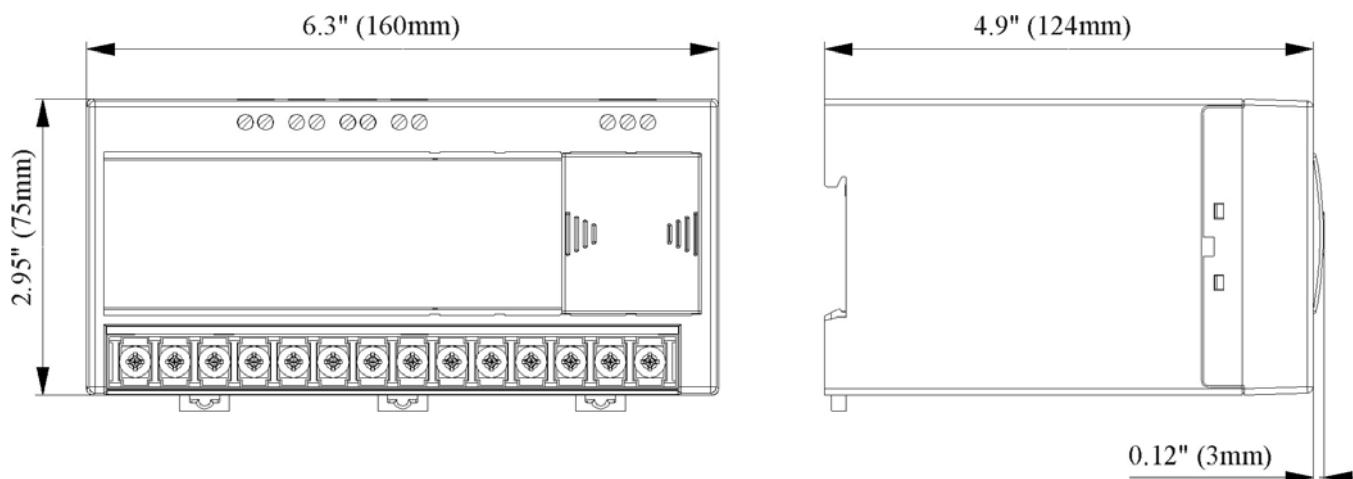

Dimensions for MT550/560 are the same as for UMT550/560.

CONNECTION TABLE


Function			Connection
Measuring input:	AC current	IL1	1/3
		IL2	4/6
		IL3	7/9
	AC voltage	UL1	2
		UL2	5
		UL3	8
		N	11
I/O			
Inputs / outputs:	Module 1	⌘+	15
		⌘⊖	16
	Module 2	⌘+	17
		⌘⊖	18
	Module 3	⌘+	19
		⌘⊖	20
	Module 4	⌘+	21
		⌘⊖	22
Auxiliary power supply:	+ / AC (L)		13
	- / AC (N)		14
	GROUND 		12
Communication:	RS485	A	23
		NC	24
		B	25

Table 4: Connections

DATA FOR ORDERING

(U)MT560/550:

The following data shall be stated:

Type of a transducer
 Type of power supply
 Type of communication
 Type of I/O module(s)
 Required energy accuracy

Supplement:

MiQen software

ORDERING

When ordering (U)MT560/550, all required specifications should be stated in compliance with the ordering code. Additional information could be stated regarding functionality of analogue outputs. Default settings for analogue outputs provided that no ordering information is given will be:

Analogue output	Input quantity	Output quantity
AO1	P (-7500...0...7500)W	-20...0...20 mA
AO2	Q (-7500...0...7500)var	-20...0...20 mA
AO3	U1 (0...500V)	0...20 mA
AO4	I1 (0...5A)	0...20 mA

If different analogue output settings are required, a proper input quantity / output quantity pair for each analogue output should be provided.

The transducers automatic range of input current (5 A) and voltage (500 V_{L-N}) is not stated in the code.

EXAMPLE OF ORDERING:

UMT560 transducer with a universal-HI supply is connected to a secondary phase voltage up to 500 V_{L-N} and 5 A secondary current. RS 232/RS 485 communication, one tariff input, one alarm output one analogue output and additional communication are applied. High accuracy energy measurement (0.5S) is required.

Ordering code:

UMT560 - 1 1 1 4 1 2 5 2

Dictionary:

RMS	Root Mean Square
PA	Power angle (between current and voltage)
PF	Power factor
THD	Total harmonic distortion
Ethernet	IEEE 802.3 data layer protocol
MODBUS / DNP3	Industrial protocol for data transmission
MiQen	ISKRA setting and acquisition Software
AC	Alternating quantity
RTC	Real Time Clock

GENERAL ORDERING CODE

All specifications are obligatory except function of analogue output(s), which should be stated in a form of description.

Transducer type:

UMT560, MT560, UMT550, MT550

1. Power supply

1 universal high
 2 universal low

2. Communication (COM1)

1 RS232/485
 2 USB
 3 Ethernet + USB

3. Communication (COM2)

0 Without
 1 RS485 over 4th I/O modul
 2 Remote display port

4. I/O modul 1

0 Without
 1 Alarm (digital) output
 2 Analogue output
 3 Pulse output
 4 Tariff input
 5 Digital input
 6 Analogue input
 7 Pulse input

5. I/O modul 2

0 Without
 1 Alarm (digital) output
 2 Analogue output
 3 Pulse output
 4 Tariff input
 5 Digital input
 6 Analogue input
 7 Pulse input

6. I/O modul 3

0 Without
 1 Alarm (digital) output
 2 Analogue output
 3 Pulse output
 4 Digital input
 5 Analogue input
 6 Pulse input

7. I/O modul 4

0 Without
 1 Alarm (digital) output
 2 Analogue output
 3 Pulse output
 4 Digital input
 5 Additional COM2
 6 Analogue input
 7 Pulse input

8. Energy accuracy

1 Active / reactive; cl.1 / cl.2
 2 Active / reactive; cl.0.5S / cl.0.5



Iskra MIS, d.d.
 Ljubljanska c. 24a, SI-4000 Kranj, Slovenia
 Tel.: +386 4 237 21 12, Fax: +386 4 237 21 29
 E-mail: info@iskra-mis.si, www.iskra-mis.si

