

Current Transformers Power Quality Accessories



- Used with the PA-9Plus and other data recorders
- Available in a flexible or clamp-on option
- A number of lengths and sizes for all power measurement needs
- Special rain tight CT allows for functionality in outside environments
- Easy to use and install

DESCRIPTION

Megger offers a comprehensive line of both flexible and clamp-on current transformers that are used with power quality analyzers and recording volt-ammeters. These accessories are specifically geared for use with the entire PA-9 Series along with the SLM-8 Recording Volt-Ammeter and the older PA7, RVA4 and RA recorders.

The flexible CT, also known as a current probe (CP) or current clamp, is self powered and does not require the use of a battery when used with Megger PA-9 or PA-9Plus instruments. Megger also markets a battery-operated CT for customers who require one with their power quality product or older Megger unit.

The Megger flexible CT effectively responds to all current measurement needs by offering a number of size/length options. Whereas the clamp-on CT is limited in its variety of uses, the flexible current transformer is most effective in tight areas where space is limited and around oversized buss bars, odd-shaped structures or thick cable bundles. Its ease of use in areas where safety is a concern makes the flexible CT a perfect choice when working in locations that contain live conductors.

The flexible CT is also available in either a rain tight or standard option. Because a majority of PA9-Plus products are used in outside environments, Megger has responded with the introduction of a rain tight CT. This is the ideal choice when weather becomes a factor. The special rain-tight CT benefits the Megger family of products because most of the current transformers in the market do not offer this important option.

For those customers using a CT with the PA-7, SLM-8, RVA4 or RA recorders, specific adapters (either the CA-PA9FCP-7 or CA-PA9-7) are required. Adapters are not needed with the PA-9 or PA-9Plus products.

SPECIFICATIONS AND ORDERING INFORMATION

Cat. No.	Current Range	Measurement Range	Frequency Range	Max. Working Voltage	Accuracy	Phase Shift
CP-600DC	600 A	1 to 400 A ac (600 A peak) 1 to 600 A dc	dc to 10 kHz @ -3 dB	600 V rms	1.5% of rdg ±1 A (1 to 100 A) 2% of rdg (100 to 400 A) 2.5% of rdg (400 to 600 A dc only)	10 to 200 A: ≤2.5° 200 to 400 A: ≤2° 45 to 65 Hz
CP-600/6000CE	600/6000 A, switchable	20 to 6000 A	40 Hz to 20 kHz	600 V rms	1% of rdg ±200 mA	<0.7° @ 50 Hz
CP-600/6000RT	600/6000 A, switchable	20 to 6000 A	40 Hz to 5 kHz	600 V rms	1% of rdg ±200 mA	<0.7° @ 50 Hz
CP-6000B7	600/6000 A, switchable	20 to 6000 A	40 Hz to 5 kHz	1000 V rms	1% of rdg ±200 mA	<1° @ 50 to 60 Hz
CP-100/1000CE	100/1000 A, switchable	10 to 1000 A	40 Hz to 20 kHz	600 V rms	1% of rdg ±200 mA	0.7° @ 50 to 60 Hz
CP-100/1000RT	100/1000 A, switchable	10 to 1000 A	40 Hz to 5 kHz	1000 V rms	1% of rdg ±200 mA	0.7° @ 50 to 60 Hz
CP-1000WCE	1000 A	10 to 1000 A	30 Hz to 5 kHz	600 V rms	Accuracy @ .1 to 10 A ≤ 3% of rdg ±0.1A, Accuracy @ 10 to 100 A ≤0.75% of rdg ±0.25 A Accuracy @ 100 to 1200 A ≤0.5% of rdg ±0.5A	0.01 to 10 A not specified, 10 A ≤3°, 50 A ≤1.5°, 200 A ≤0.75°, 1000 A ≤0.5°
CP-100CE	100 A	1 to 100 A	40 Hz to 10 kHz	600 V rms	Accuracy @ 0.1 to 1 A ≤2% of rdg ±0.2 A, Accuracy @ 10 to 80 A ≤1% of rdg ±0.2A, Accuracy @ 80 to 150 A ≤1.5% of rdg ±0.2 A	0.01 to 1 A not specified, 1 to 20 A ≤3°, 20 to 100 A ≤2°
CP-300/3000CE	300/3000 A, switchable	10 to 3000 A	40 Hz to 20 kHz	1000 V rms	1% of rdg ±200 mA	<0.7° @ 50 to 60 Hz
CP-300/3000RT	300/3000 A, switchable	10 to 3000 A	40 Hz to 5 kHz	1000 V rms	1% of rdg ±200 mA	<0.7° @ 50 to 60 Hz
CP-20CE	20 A	0.1 to 20 A	40 Hz to 10 kHz	600 V rms	Accuracy @ 0.1 to 1 A ≤2.5% of rdg, Accuracy @ 1 to 20 A ≤1% of rdg	0.1 to 1 A ≤5°, 1 to 20 A ≤3°
CP-5CE	5 A	0.1 to 10 A	40 Hz to 3 kHz	600 V rms	1% of rdg ±5 mV	1 to 5 A 1°, 5 to 10 A 1.5°



Current Probe
CP-600/6000CE
CP-300/3000CE
CP-100/1000CE



Current Clamp
CP1000WCE




Current Clamps
CP-5CE
CP-20CE
CP-100CE



Rain Tight Current Probe
CP-600/6000RT
CP-300/3000RT
CP-100/1000RT
CP-6000B7

ADDITIONAL SPECIFICATIONS AND ORDERING INFORMATION

Cat. No.	Output Signal	Crest Factor (Mid-range)	Rain Tight	Battery Powered	Style	Length	Inside Dia, Max	Adapter Requirements (No adapter needed with PA-9 or PA-9Plus)
CP-600DC	1 mV/A	ac: 3.3 dc: 2.5		9 V alkaline (approx. 80 hrs)	Clamp	9 ft cable	2 in.	CA-PA9-7 to use probes with PA7, SLM-8, RVA4, RA recorders
CP-600/6000CE	1 mV/A, 0.1 mV/A	4.5		N/A	Flexible	36 in. coil	12 in.	CA-PA9FCP-7 to use up to 4 probes with PA7, SLM-8, RVA4, RA recorders
CP-600/6000RT	1 mV/A, 0.1 mV/A	4.5	■	N/A	Flexible	36 in. coil	12 in.	CA-PA9FCP-7 to use up to 4 probes with PA7, SLM-8, RVA4, RA recorders
CP-6000B7	1 mV/A, 0.1 mV/A	10	■	9 V (2000 hrs. min.)	Flexible	36 in. coil	12 in.	CA-PA9-7 to use probes with PA7, SLM-8, RVA4, RA recorders
CP-100/1000CE	10 mV/A, 1 mV/A	9		N/A	Flexible	36 in. coil	12 in.	CA-PA9FCP-7 to use up to 4 probes with PA7, SLM-8, RVA4, RA recorders
CP-100/1000RT	10 mV/A, 1 mV/A	9	■	N/A	Flexible	36 in. coil	12 in.	CA-PA9FCP-7 to use up to 4 probes with PA7, SLM-8, RVA4, RA recorders
CP-1000WCE	1 mV/A	9		N/A	Clamp	9 ft cable	2 in.	CA-PA9-7 to use probes with PA7, SLM-8, RVA4, RA recorders
CP-100CE	10 mV/A	3		N/A	Clamp	9 ft cable	.78 in.	CA-PA9-7 to use probes with SLM-8, RVA4, RA recorders
CP-300/3000CE	10 mV/A, 1 mV/A	3		N/A	Flexible	36 in. coil	12 in.	CA-PA9FCP-7 to use up to 4 probes with PA7, SLM-8, RVA4, RA recorders
CP-300/3000RT	10 mV/A, 1 mV/A	3	■	N/A	Flexible	36 in. coil	12 in.	CA-PA9FCP-7 to use up to 4 probes with PA7, SLM-8, RVA4, RA recorders
CP-20CE	50 mV/A	3		N/A	Clamp	9 ft cable	.78 in.	CA-PA9-7 to use probes with PA7, SLM-8, RVA4, RA recorders
CP-5CE	200 mV/A	3		N/A	Clamp	9 ft cable	12 in.	CA-PA9-7 to use probes with PA7, SLM-8, RVA4, RA recorders

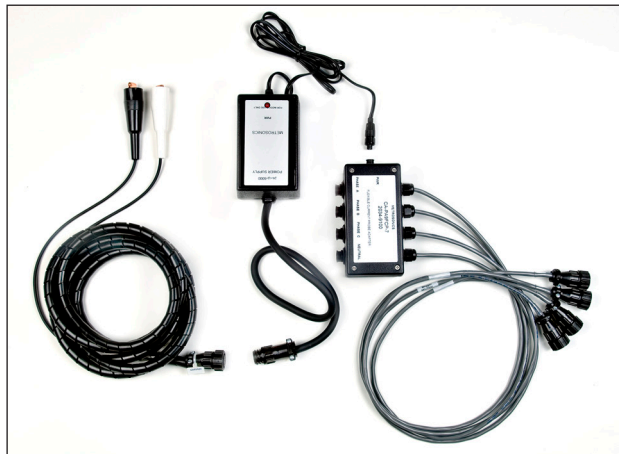

Adapter C/N CA-PA9FCP-7, shown, is used with up to four probes with the PA7, SLM-8, RVA4 and RA Recorders. Used with the following CTs:
 CP-600/6000CE
 CP-300/3000CE
 CP-100/1000CE
 CP-600/6000RT
 CP-300/3000RT
 CP-100/1000RT



Adapter C/N CA-PA9-7, shown, is used with a probe with the PA7, SLM-8, RVA4 and RA Recorders. Used with the following CTs:

- CP-6000B7
- CP-600DC
- CP-5CE
- CP-20CE
- CP-1000CE
- CP-1000WCE



Current Clamp
CP-600DC

UK
Archcliffe Road, Dover
CT17 9EN England
T (0) 1 304 502101
F (0) 1 304 207342

UNITED STATES
4271 Bronze Way
Dallas, TX 75237-1018 USA
T 1 800 723 2861
T 1 214 333 3201
F 1 214 331 7399

OTHER TECHNICAL SALES OFFICES
Valley Forge USA, College Station
USA, Sydney AUSTRALIA, Täby
SWEDEN, Ontario CANADA, Trappes
FRANCE, Oberursel GERMANY, Aargau
SWITZERLAND, Kingdom of BAHRAIN,
Mumbai INDIA, Johannesburg SOUTH
AFRICA, and Chonburi THAILAND

ISO STATEMENT
Registered to ISO 9001:1994 Reg no. Q 09250
Registered to ISO 14001 Reg no. EMS 61597
PQ_ACCESSORY_DS_en_V04
www.megger.com
Megger is a registered trademark